


STANICA SA 4 TRIPLE TUNERA IZLAZ DVB-T PCU4121

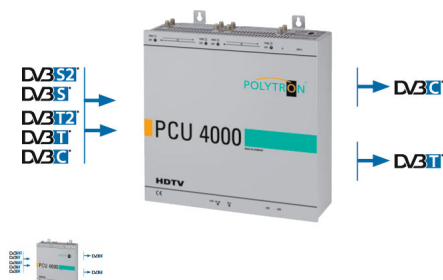

Ocjena: Nije još ocijenjeno

Cijena

Cijena: 1884,66 €

[Postavite pitanje o ovom proizvodu](#)

Opis

DVB-S(2) / DVB-T(2) / DVB-C into DVB-T

Conversion of 4 terrestrial channels

The triple tuner reception headend PCU 4121 converts the signals of four terrestrial or cable network channels into DVB-T channels.

The four inputs are each provided with a CI interface for decoding encrypted signals. The dual modulators can split the selected channels to two output channels in order to avoid bandwidth problems. The headend can be programmed fastly and easily via the USB interface.

Features like LCN, NIT, TSP and LAN administration complete the practical functionality.

The high quality components and the "Made in Germany" in-house development and production enable you to build up reliable and durable reception systems with POLYTRON's PCU 4121.

Triple tuners: input signal freely selectable with 4 x CI slots MPEG 2 and MPEG 4 compatible output signal switchable output channels freely selectable from 112-862 MHz

adjacent channel processing

level attenuation 0-12 dB

built-in LNB power supply

temperature-controlled fans

dual modulators

transponder content can be erased TSP

logical Channel Numbering LCN

Network Information Table NIT compatible

built-in LAN controller

Made in Germany

Typ / Type

PCU 4121

Artikel-Nr. / Article no.

5552160

Eingänge / Inputs

4

CI-Schnittstellen / CI slots

4

Eingangsspiegel / Input level

50-80 dBµV

Demodulator

DVB-S2/S

SR DVB-S / QPSK

1 - 45 MS/s

SR DVB-S2 / QPSK
1 - 45 MS/s
SR DVB-S2 / 8PSK
1 - 45 MS/s
Modulation
8PSK / QPSK
CR DVB-S / QPSK
1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
CR DVB-S2 / 8PSK
3/5, 2/3, 3/4, 5/6, 8/9, 9/10
Roll off
0.35, 0.25, 0.20
DVB-T
Modulation
QPSK, 16QAM, 64QAM
FFT
2K, 8K
Channel bandwidth
7, 8 MHz
Code rate
1/2, 2/3, 3/4, 5/6, 7/8
Guard interval
1/4, 1/8, 1/16, 1/32
DVB-T2
Modulation
QPSK, 16QAM, 64QAM, 256QAM
FFT
1K, 2K, 4K, 8K, 16K, 32K
Channel bandwidth
7, 8 MHz
Code rate
1/2, 3/5, 2/3, 3/4, 4/5, 5/6
Guard interval
1/4, 5/32, 1/8, 5/64, 1/16, 1/32, 1/64, 1/128
DVB-C
Modulation
16QAM, 32QAM, 64QAM, 128QAM, 256QAM
Symbol rate
7.2 Msps
Channel bandwidth
6, 7, 8 MHz
Ausgangsmodulation im Auslieferungszustand
Output modulation ex works
DVB-T
Ausgangskanäle / Output channels
4 + 2
Frequenzbereich / Frequency range
112-862 MHz
Signal constellation
QPSK, 16, 32, 64 QAM
FEC
1/2, 2/3, 3/4, 5/6, 7/8
Bandbreite / Bandwidth
7 / 8 MHz
Anzahl der Träger / Number of carriers
2K, 8K
Ausgangspegel / Output level
90 dB μ V
Regelbare Dämpfung je Kanal / Channel attenuation
0...12 dB
MER
typ. 38 dB
Leistungsaufnahme / Power consumption
40 W
Spannungsversorgung / Operating voltage
180-265 V, 50/60 Hz
Maße (B x H x T) / Dimensions (W x H x D)
331 x 328 x 103 mm

Recenzije

Trenutno nema recenzija za ovaj proizvod.