


MULTISWITCH CENTAURI 13/8

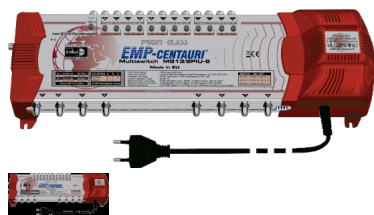

Ocjena: Nije još ocijenjeno

Cijena

Cijena: 199,08 €

[Postavite pitanje o ovom proizvodu](#)

Opis

	LNB inputs	950-2300 MHz
	Terr. input	5-862 MHz (passive) 40-862 MHz (active)
	Outputs	5-2300 MHz (passive) 40-2300 MHz (active) DiSEqC 1.0 (2.0) commands
Control		0 dB avg
Insertion loss	Sat.	16 dB avg
	Terr. passive	2 dB avg
	Terr. active	20 dB min
Sat. inputs isolation	Between V/H polarisations	20 dB min
	Between low/high bands	25 dB min
	Between sat. systems	90 dB μ V avg**
Maximum input level*	Sat.	100 dB μ V avg (passive)
	Terr.	90 dB μ V avg (active)
Maximum output level*	Sat.	90 dB μ V avg
	Terr.	84 dB μ V avg (passive) 88 dB μ V avg (active)
Power consumption	From each receiver	75 mA (18 V)
	From internal power supply	4.5 W (passive) 6.5 W (active) + LNB
Terr. preamplifier supply		150 mA max (12 V DC)
Dimensions (w,d,h)		47.0 x 15.2 x 8.7 cm (power cord length 130 cm)
Temperature range		-30 ~ +70 °C

Recenzije

Trenutno nema recenzija za ovaj proizvod.